

E-PRO 6



Save 85% in energy costs (9.7 watt LED versus 65 watt 65BR30) by using the E-PRO Series 6" downlight instead of conventional incandescent. 6" E-PRO high output models are available in 3000K and 4000K.

Performance

- Three color temperatures available (see below for finishes available)
- Dimmable with most standard incandescent (triac) and low voltage electronic (ELV) dimmers for 5-100% light control
- Eliminate up to 14 lamps replacements - long life SMD LEDs last up to 35,000 hours, compared to incandescent lamps with a rated life of 2,500 hours
- Energy Star compliant, for use in damp locations

Construction

- Aluminum heat sink sealed in heavy duty plastic housing
- Aluminum trim ring with durable powder coat finish
- Polycarbonate lens diffuses light



Installation

- Fits most standard 6" recessed cans
- Requires 4-1/4" clearance inside 6" cans

Photometrics

EP6-E26-30-WH

Luminous flux	745Lm
Maximum intensity	346 cd
Input wattage	9.6W
Lumens per watt	77 LPW
Beam angle	93.3°

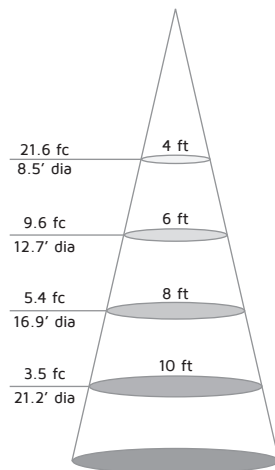

Specifications

Series	EP6
Input voltage	120V AC, 60Hz
Color temperature	2700K / 3000K / 4000K
CRI	81+
Wattage	9.7W / 13W
Lumens	See individual product
Beam angle	93.3° (EP6) and 95.6° (EP6H)
Dimming	Most triac and ELV dimmers
Housing	Aluminum
Lens	Frosted polycarbonate
Rating	c/ETL/us Listed, damp locations
Dimensions	7-1/8" Dia. x 4-3/4" H
Mounting	Recessed
LED type	27 x SMD 2323 LEDs
Rated life	35,000 hrs

EP6 Downlight



Brushed Steel
EP6-E26-27-BS
 9.7W / 655Lm / 2700K



White
EP6-E26-27-WH
 9.7W / 690Lm / 2700K



White
EP6H-E26-30-WH
 13W / 1000Lm / 3000K

EP6-E26-30-WH
 9.7W / 745Lm / 3000K

EP6H-E26-40-WH
 13W / 1125Lm / 3000K

EP6-E26-40-WH
 9.7W / 800Lm / 4000K

AL-GU24 GU24 adaptor, sold separately for Title 24 compliance