


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

H0220

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THIS INSTRUCTION.

## Hardware Package (included):

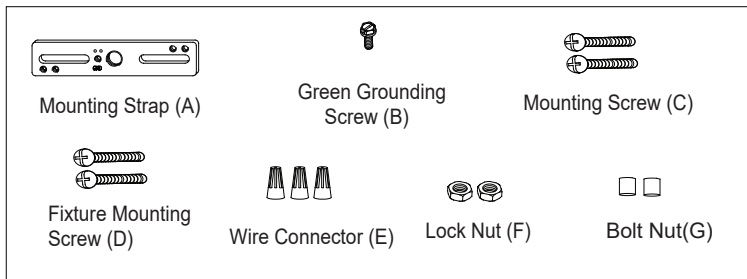

## Installation Steps

Turn off the power at fuse or circuit box.

### 1. Rod Connections:

- Thread the fixture wire from the fixture through the lower rod, then secure the lower rod onto fixture using the threaded pipe.
- Thread the fixture wire through the middle rod, and then secure the middle rod onto the lower rod using the threaded pipe.
- Thread the fixture wire through the upper rod, and then secure the upper rod onto the middle rod using the threaded pipe.

**Note: Length adjustable from 20" to 62". Use fewer rods if shorter length is desired.**

- Thread the fixture wire through the canopy kit, then secure the rod assembly to the set nipple of the canopy kit.

- Attach the mounting strap to outlet box by using two mounting screws.

- Pull out the source wires from the outlet box. Make wire connections using wire connectors as follows:

- Connect the smooth-coated wire (marked) from the fixture to the black wire from the power source.
  - Connect the ribbed-coated wire (unmarked) from the fixture to the white wire from the power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire connector.
- Carefully put the wires back into the outlet box.




- Attach the canopy kit to the mounting strap by inserting the fixture mounting screws, then secure it with two bolt nuts.

- Attach the glass shade onto the fixture, secure it with a socket ring.

- Install bulb (not included). See relamping label at socket area or packaging for maximum allowed wattage.

- Angled mounting recommended for a vaulted or angled ceiling. (See Fig. 1)

Turn on the power at fuse or circuit box.

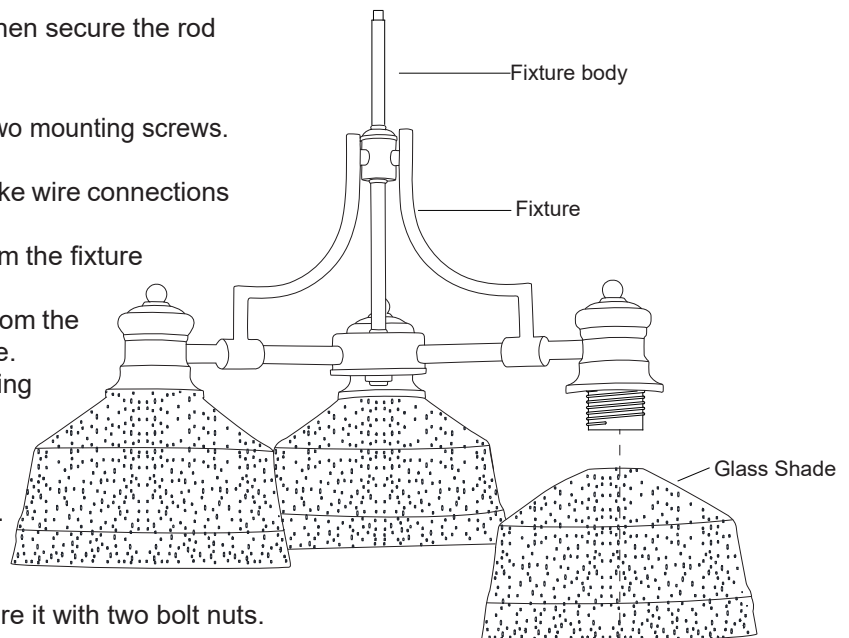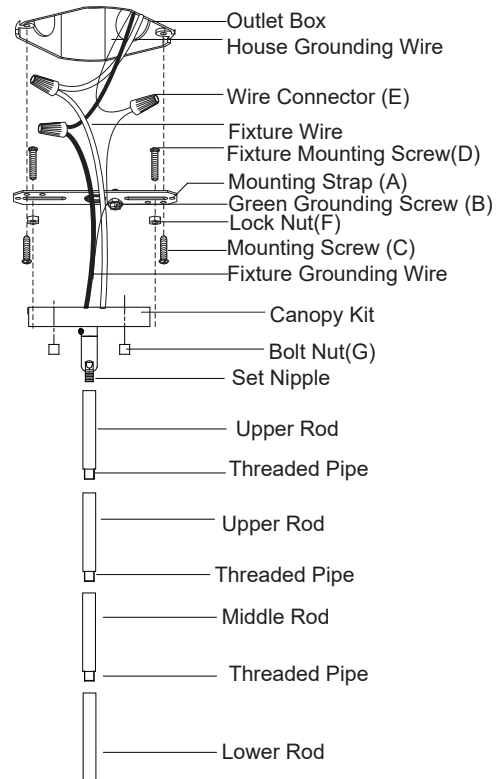


Bulb Type A Max.60W  
(not included)

**VAXCEL**

181206


Fig. 1

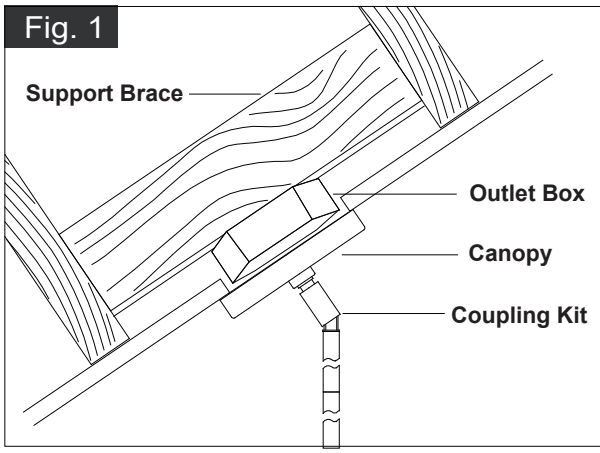

The following parts are available for re-order if damaged or missing.

**Spare Parts List:**

Mounting Strap (A)	Green Grounding Screw (B)	Mounting Screw (C)	→ Mounting Hardware 5981MM (1 SET)
Fixture Mounting Screw (D)	Wire Connector (E)	Lock Nut (F)	
12"Rod 3159RD (3PC)	6"Rod 3160RD(1PC)	3"Rod 3161RD (1PC)	Glass (3 PCS) 10028CS

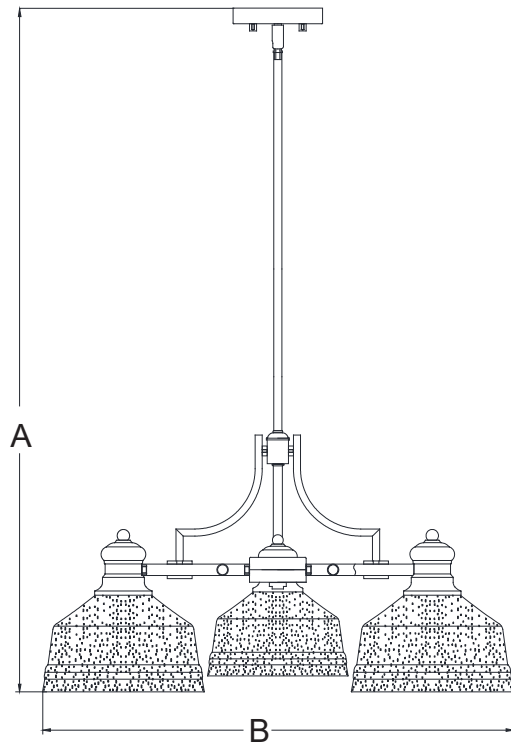

A:65"  
B:26"