

# ASSEMBLY AND INSTALLATION INSTRUCTIONS


PD35413

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER WHILE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE:** Before installing, consult local electrical codes for wiring and grounding requirements.

## Installation Steps

1. Attach the nipple to the mounting strap, and then secure with a washer and a hex nut.
2. Attach the mounting strap to the ceiling box by using two mounting screws.
3. Choose two certain same length of the chain links you need, hook one end of the chains to the arms, and then weave the fixture wire and the grounding wire through one of the chain links. Then connect the other end of the chain links with the loops by using the loop locks.
4. Thread the fixture wire and grounding wire through the loop and canopy in order.
5. Make wire connections with wire nuts:
  - The smooth wire (marked) from fixture to the black wire from power source.
  - The ridged wire (unmarked) from fixture to the white wire from power source.
  - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with the wire nut.Carefully tuck wires back into the ceiling box.
6. Attach the canopy to the mounting strap by inserting the nipple, and then secure with the finial.
7. Attach the glass shades to the glass holders, and then secure with the socket rings.
8. Install bulbs. **(Please do not exceed the maximum capacity that is recommended on the package.)**
9. Turn on the power at fuse or circuit box.

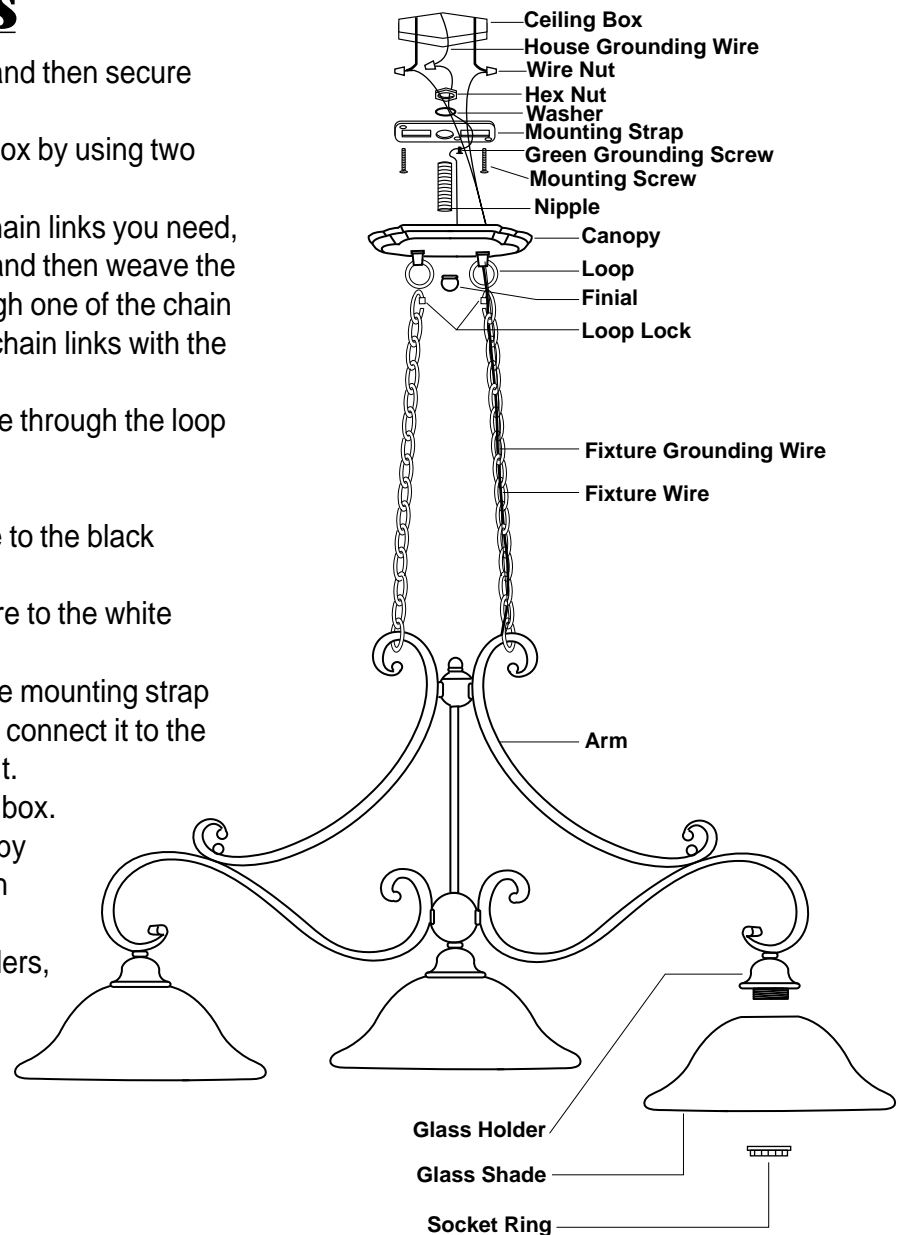

**VAXCEL**  
LIGHTING

050706